

Opto Plus LED Corp.
0.8" Case Mold Type LED Display
OPD-Q8010LB-BW
OPD-Q8011LB-BW

● **FEATURES**

- 0.8 inch (20.4 mm) Digit Height.
- Low current operation.
- Case mold type.
- Black face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The OPD-Q8010LB-BW & OPD-Q8011LB-BW is a 0.8 inch (20.4 mm) height quadruple digits display.

This device utilizes Super Bright Blue LED chip which are made from InGaN on a transparent GaN substrate. The display has Black face, White segment..

● **DEVICE**


| PART NO | DESCRIPTION |
|-------------------|--------------------|
| Super Bright Blue | |
| OPD-Q8010LB-BW | Common Anode |
| OPD-Q8011LB-BW | Common Cathode |

RoHS Compliance



Pb free.



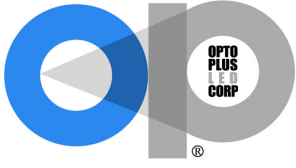


Opto Plus LED Corp.

0.8" Case Mold Type LED Display

OPD-Q8010LB-BW


OPD-Q8011LB-BW


● MECHANICAL DIMENSIONS

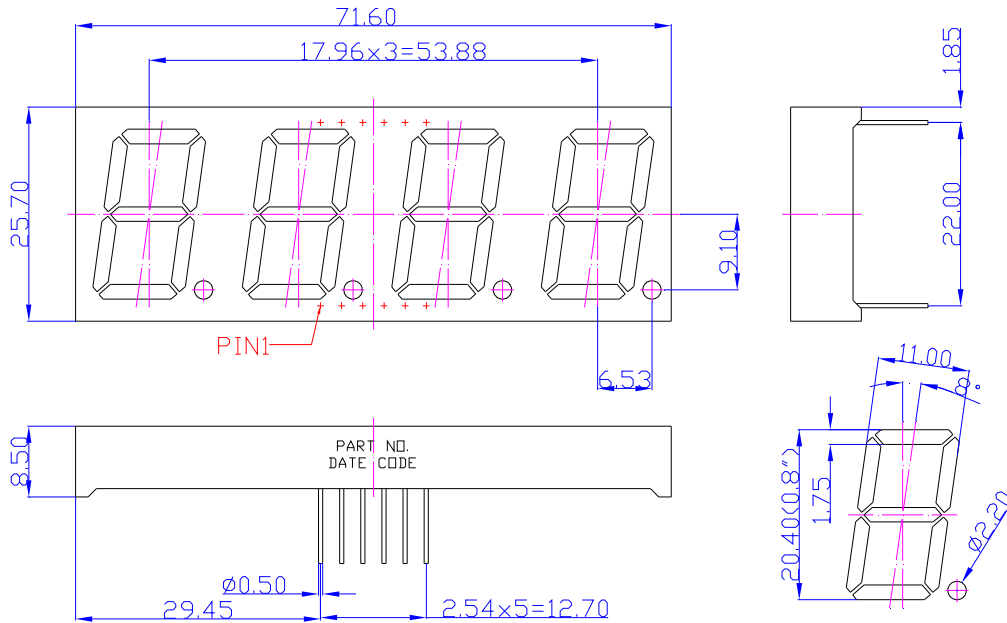

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

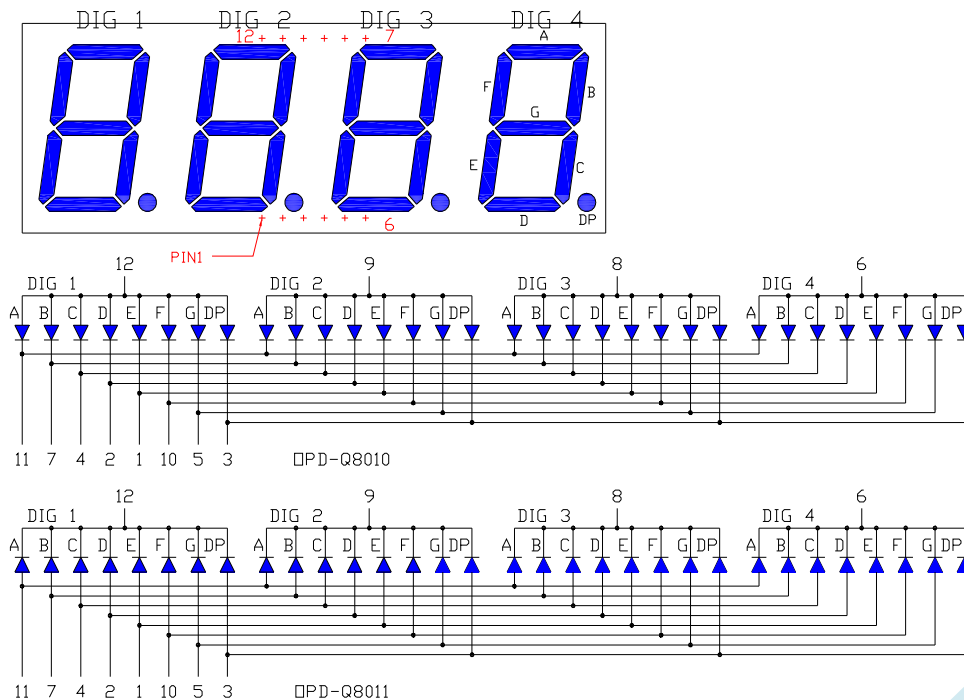

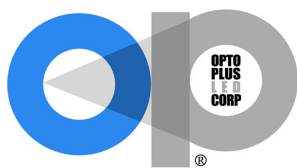

Opto Plus LED Corp.
0.8" Case Mold Type LED Display
OPD-Q8010LB-BW
OPD-Q8011LB-BW


● **LB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT $T_a=25^{\circ}\text{C}$

| Parameter | Symbol | Super Bright Blue | Unit |
|---|-----------|-------------------|---------|
| Power dissipation per dice | P_{AD} | 120 | mW |
| Derating liner from 25 °C per dice | - | 0.4 | mA / °C |
| Continuous forward current per dice | I_{AF} | 30 | mA |
| Peak current per dice (duty cycle 1/10, 1kHz) | I_{PF} | 100 | mA |
| Reverse voltage per dice | V_R | 5 | V |
| Operating temperature | T_{OPR} | -25 to +85 | °C |
| Storage temperature | T_{STG} | -25 to +85 | °C |

ELECTRICAL - OPTICAL CHARACTERISTICS AT $T_a=25^{\circ}\text{C}$

| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------------|-----------------|---------------------|------|------|------|---------------|
| Forward voltage | V_F | $I_F = 20\text{mA}$ | - | 3.2 | 4.0 | V |
| Reverse current | I_R | $V_R = 8\text{V}$ | - | - | 10 | μA |
| Dominant wavelength | λ_D | $I_F = 20\text{mA}$ | - | 470 | - | nm |
| Luminous intensity | I_V | $I_F = 20\text{mA}$ | - | 80 | - | mcd |
| Spectral radiation bandwidth | $\Delta\lambda$ | $I_F = 20\text{mA}$ | - | 30 | - | nm |

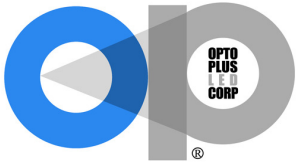

Opto Plus LED Corp.

0.8" Case Mold Type LED Display

OPD-Q8010LB-BW

OPD-Q8011LB-BW

● LB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

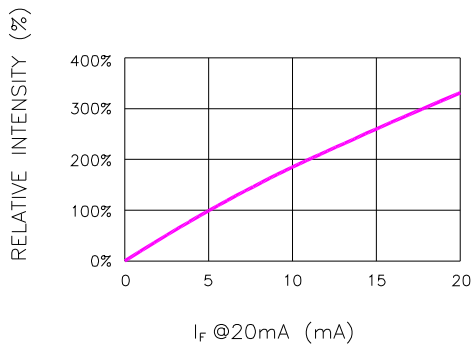


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

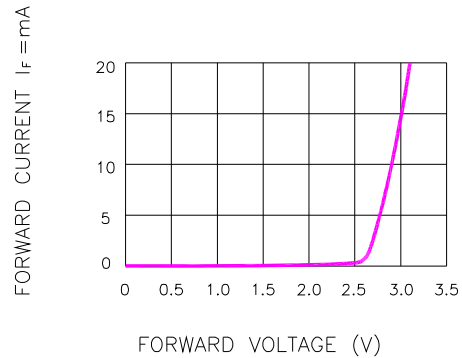


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

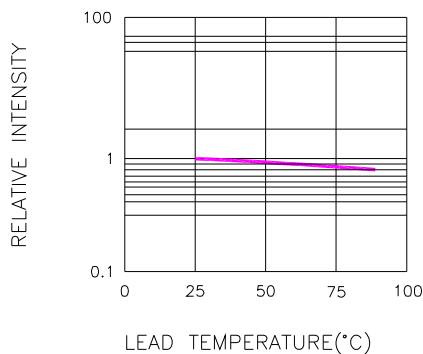


Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

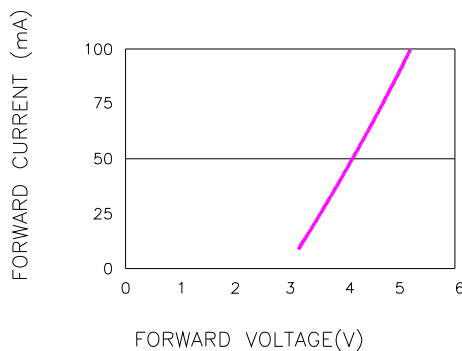


Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD (100us TEST PULSE, 1% DUTY CYCLE)

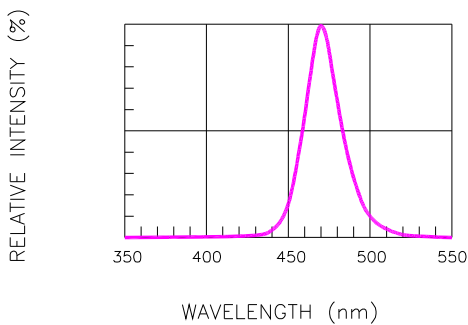


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH



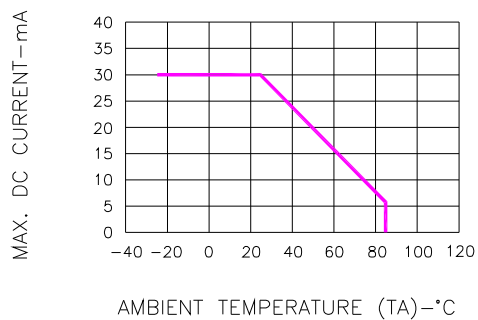


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

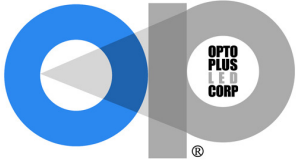

Opto Plus LED Corp.
0.8" Case Mold Type LED Display
OPD-Q8010LB-BW
OPD-Q8011LB-BW

● **RECOMMEND SOLDERING PROFILE**

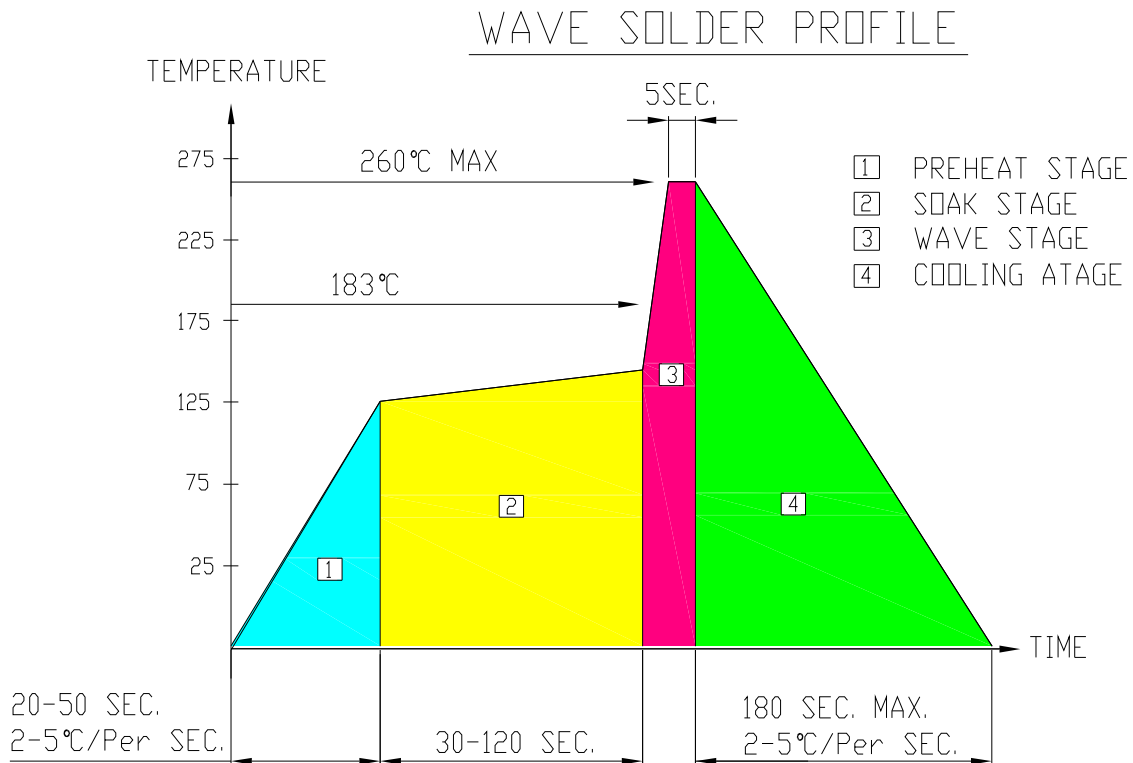

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within ≤ 4 sec under 245°C.